

TECHNICAL DATA - INSTALLATION INSTRUCTIONS

Model FRC AD



Non-binding pictures

● Recommendations

Thank you for choosing a STRAMATEL scoreboard!

We hope that you will be fully satisfied with our product. For any information, please do not hesitate to contact us.

In order to install the scoreboard set correctly, we recommend that the instructions indicated are followed correctly, and that the material supplied by STRAMATEL is used correctly without any alteration.

However, if extra information is required, please contact Stramatel technical service with the model reference and serial number (on the sticker under the control console).

Any alteration made to the equipment delivered may deteriorate it and result in the cancelling of the warranty.

Caution: Installation must be performed by qualified staff and must comply with IEC 364 and national wiring regulations.

● Technical data

Equipment for outdoor use.

The control console should be protected against bad weather conditions (during the operation but also when the scoreboard is not in use).

Use a soft dry cloth to clean the equipment.

Scoreboard


Class I equipment – Must be connected to earth.

| | |
|----------------|---|
| Dimensions | 3000 x 2058 x 90 mm (M1: 3000x750mm / M2: 3000x550mm / M3: 3000x750mm) |
| Weight | 121 kg (M1: 45 kg / M2: 34 kg / M3: 42 kg) |
| Power supply | 100-240V 50/60Hz 4,45-1,85A |
| Power consumed | 445VA (max) |



Control console – Radio controlled model

| | |
|------------------------|---|
| Dimensions | 340 x 175 x 60 mm |
| Weight | 790 g |
| Transmission frequency | 863 - 870 MHz |
| Power supply | 100-240V 50/60Hz / 12Vdc 500mA |
| Internal batteries | NIMH 5x1,2V 1300mAh (22 hours autonomy) |



Use only power supply and batteries supplied by STRAMATEL.

Control console recharge: turn off and disconnect the USB keyboard. Plug the power supply into the back of the control console, then plug it into an appropriate mains outlet (the socket should be as close as possible to the control console and must be easily accessible).

Leave the control console under constant recharge when not in use.

Control console – Cable transmission model

| | |
|------------|-------------------|
| Dimensions | 340 x 175 x 60 mm |
| Weight | 650 g |



Power supply: the control console is powered by the scoreboard. It should only be connected to the STRAMATEL system supplied.

● Environment and recycling

Please help us to protect the environment by disposing of the packaging in accordance with the national regulations for waste processing.

Recycling of obsolete appliances: appliances with this label must not be disposed off with the general waste. They must be collected separately and disposed off according to local regulations.




● **Before installation**

The electronic elements controlling the luminous display are mounted on extractable racks (R). In order to be able to carry out any maintenance, a clear space of at least 30 cm is necessary for the extraction of the racks. Attention: installation must be performed by qualified staff.


The scoreboard will be fixed onto 2 vertical 180x90mm I-Beams with supplied fixing clamps (D).

The fastening rails (G) located at the rear of the scoreboard, are equipped with M10 spring nuts.

Fix 2 clamps (D) on each fastening rail (G) as mentioned below. Tighten the screws (V), then unscrew them by quarter a turn (as a first step, the clamps should not be fully tightened).

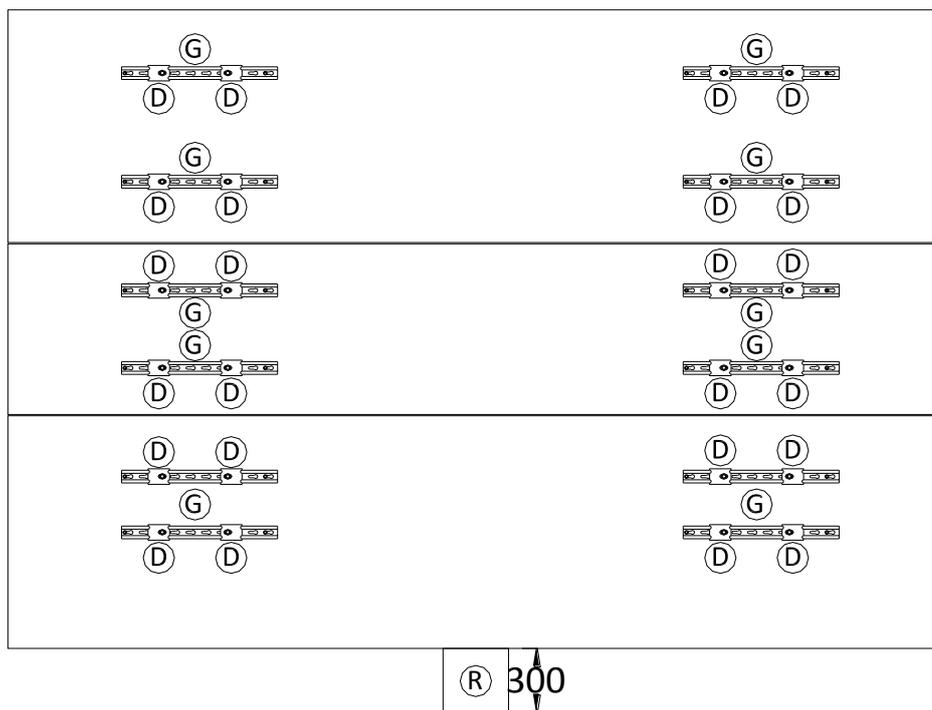

Dimensions en mm

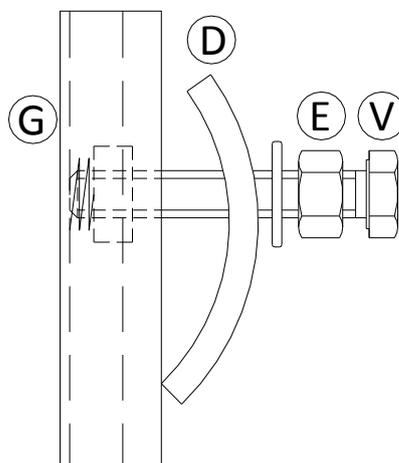

● **Scoreboard installation**

In order to make the installation easier, the anchor points (I), located on the top side of the modules can be used (NB: Anchor points = insert holes in aluminium frame). If you want to use them to lift or install the modules, replace the black plastic screws by M6x40 eyescrews (closed rings, not supplied). Caution: the black plastic screws should not be used to lift or fix the modules (they are only dedicated to protect the scoreboard from water intrusion).

Each module is noted with a sticker Mxx. Please strictly follow the below instructions.

Lift the module M1 and lean it against the 2 vertical 180x90mm I-Beams. Make sure the module M1 is in a horizontal position.

On each fastening rail, move the clamps as close to the I-beams as possible (the screws should imperatively touch the I-Beam to make sure the clamps are properly fixed). Tighten the screws (V) on the fastening rails (G).



Tighten the lock nuts (E) to secure the clamps (D) on each I-Beam

Lift the module M2 above the module M1 and fix it on the I-Beams as previously instructed for the installation of the module M1.

Lift the module M3 above the module M2 and fix it on the I-Beams as previously instructed for the installation of the module M1.

Put the black plastic screws back into anchor points (I) of the module M3.

Plug in the connectors (Y) between the modules.

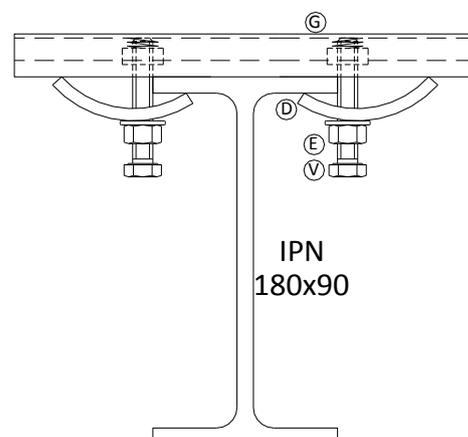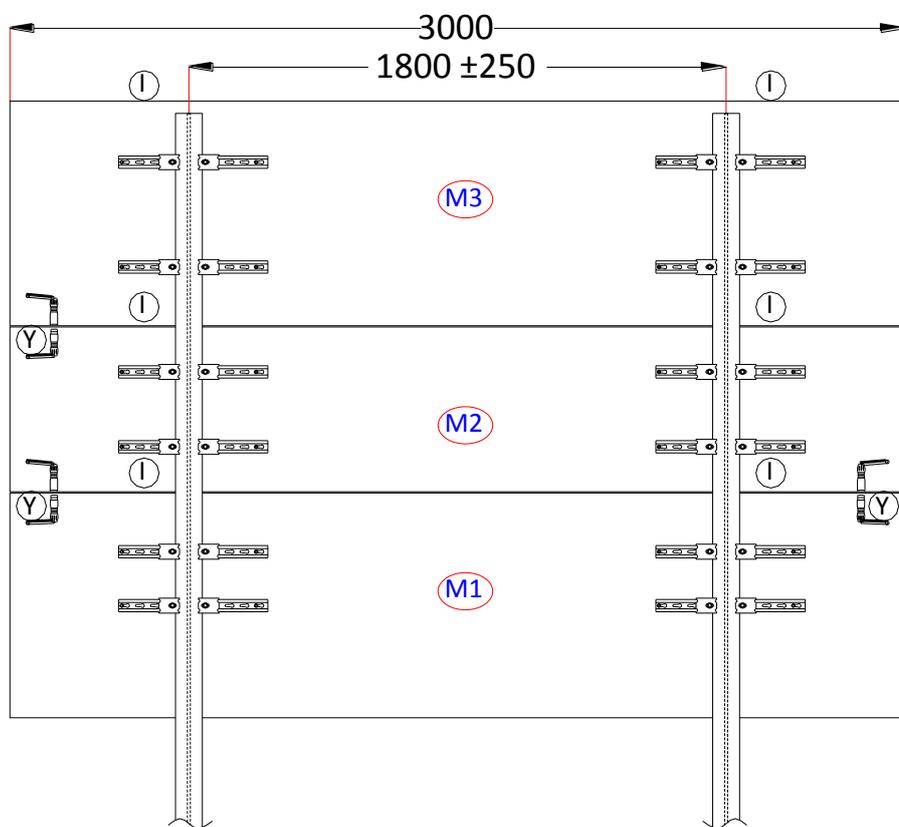


● **Radio controlled model - Electrical installation**

Caution: the scoreboard must not be connected to mains before installation has been fully completed.

Mains cable (P)


Connect the cable (P) to 100-240V electrical power supply. The electrical power supply should be protected via a bipolar 4A circuit breaker (not supplied). Bipolar circuit breaker must be easy to reach.

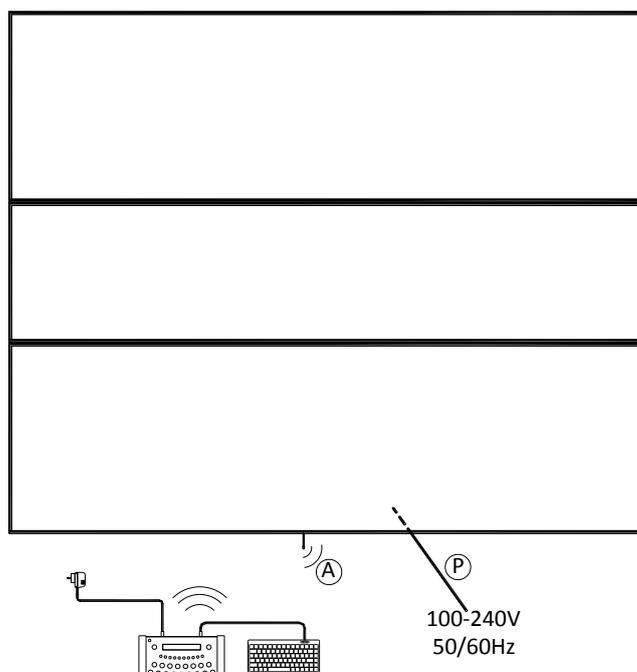

In case a cable set needs to be installed: control cable and wall junction box

Install the cable set as described in "Cable transmission model - Electrical installation".

Note: radio controlled model: +24V is not connected in the wall junction box (wall junction box YBJ35).

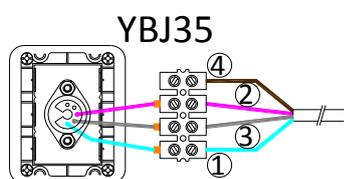

Control cable (Q): (1) = GND = blue wire / (2) = Rx+ = white wire / (3) = Rx- = grey wire / (4) = +24V = transparent wire

● **End of the installation**

Turn on the power.

Try out the scoreboard operating functions (see operating functions).

● Cable transmission model - Electrical installation

Caution: the scoreboard must not be connected to mains before installation has been fully completed.

Control cable and wall junction box

The transmission cable supplied is a telephone cable: type 2 pairs 6/10th.

Mount the wall junction box YBJ30 onto the wall close to the scoring table.

Connect the control cable (Q) on the connector (T) of the scoreboard making sure that the colour code is followed (Please note – RS485: Rx+ and Rx- must be connected on a twisted pair).

Extract the electronic rack (R) from the scoreboard: unscrew the two nuts (B) with a 7 mm pipe spanner, then let the rack (R) slide downwards.

Put the connector (T) inside the scoreboard through the grommet (K).

Plug the connector (T) on the electronic circuit board and fix the cable on the rack with a plastic collar (J).


Put the rack (R) back inside the scoreboard and screw the two nuts (B).

Fix the control cable into place making sure that it does not run alongside the 100-240V mains cables.

Connect the end wires into the junction box YBJ30, making sure that the colour code is followed. If several units are connected together, their cables must be wired in parallel in the wall junction box.

Mains cable (P)

Connect the cable (P) to 100-240V electrical power supply. The electrical power supply should be protected via a bipolar 4A circuit breaker (not supplied). Bipolar circuit breaker must be easy to reach.

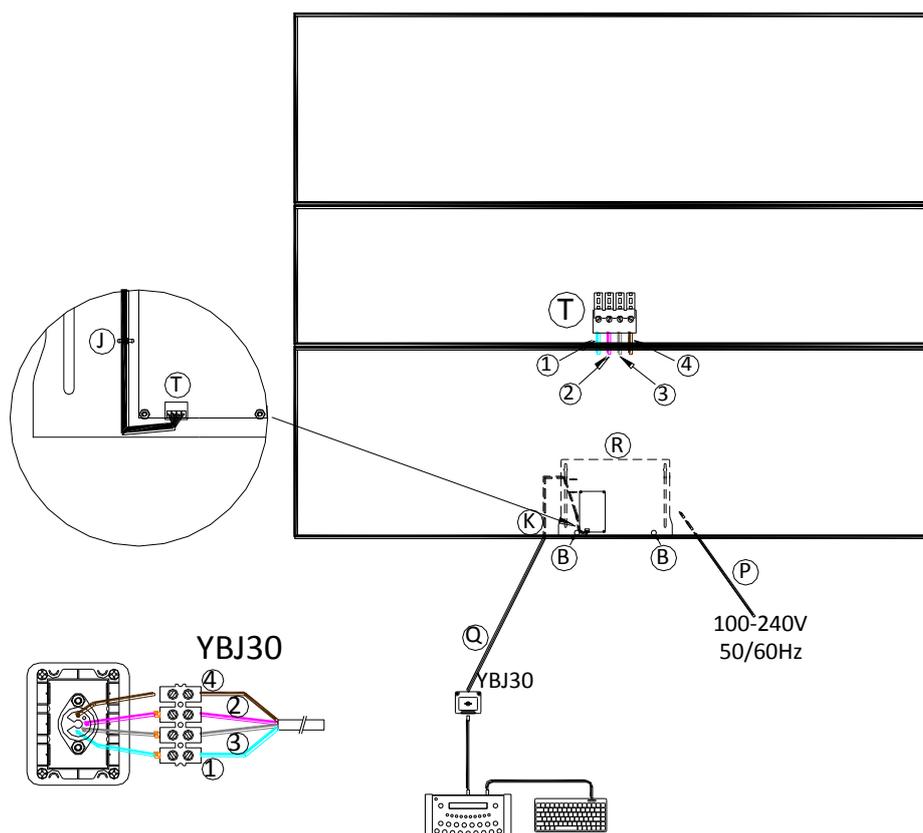

Control cable (Q): (1) = GND = blue wire / (2) = Rx+ = white wire / (3) = Rx- = grey wire / (4) = +24V = transparent wire

● End of the installation

Turn on the power.

Try out the scoreboard operating functions (see operating functions).

STRAMATEL

●●●● *ELECTRONIC SCOREBOARDS*



ZI de Bel Air

44850 LE CELLIER

FRANCE

☎: +33 (0)2 40 25 46 90

Fax: +33 (0)2 40 25 30 63

✉ stramatel@stramatel.com

www.stramatel.com